

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 July 2003 (24.07.2003)

PCT

(10) International Publication Number
WO 03/061161 A2

(51) International Patent Classification⁷: **H04B 10/142**

(21) International Application Number: PCT/GB03/00024

(22) International Filing Date: 7 January 2003 (07.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0200770.6 15 January 2002 (15.01.2002) GB

(71) Applicant (for all designated States except US): **QINETIQ LIMITED** [GB/GB]; Registered Office 85, Buckingham Gate, London SW1E 6PD (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PEARSON, Guy, Neville** [GB/GB]; Qinetiq Malvern, St Andrews Road, Malvern WR14 3PS (GB).

(74) Agent: **DAVIES, Philip**; IP Qinetiq Formalities, Cody Technology Park, A4 Building Ively Road, Farnborough, Hampshire GU14 0LX (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: TRANSMISSION SYSTEM

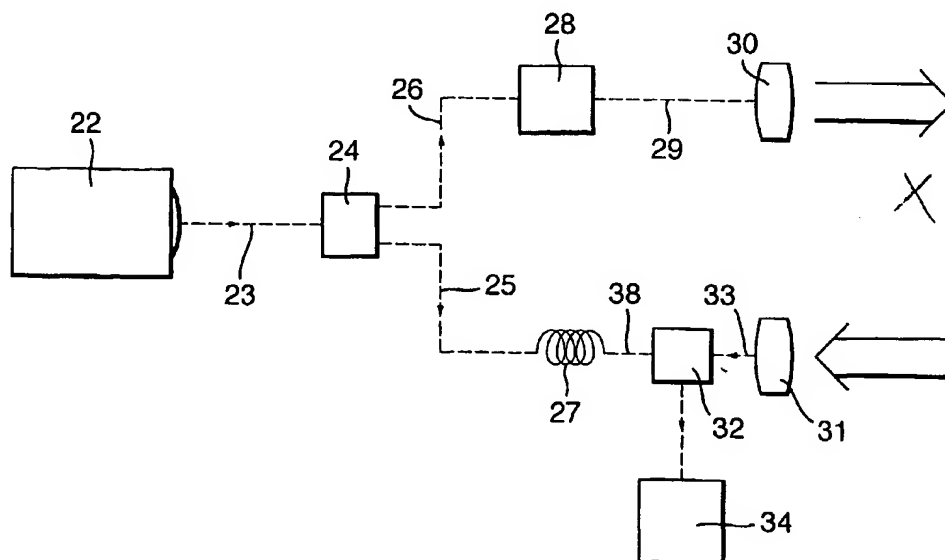

(57) Abstract: An optical transmission system includes an optical source such as a laser having an optical output, this optical output being modulated such that it has periods of operation having a first set of characteristics interspersed with periods of operation having a second set of characteristics. The output is then split into at least two signals, and one of the signals delayed with respect to the other signal before the two are mixed, such that a portion of the modulated optical output having the first set of characteristics in one of the signals corresponds with a portion of the modulated optical output having the second set of characteristics of another of the signals. This allows a single optical source to provide to a receiver a local oscillator signal simultaneously with a data carrying signal. The system is particularly suitable for lidar applications, including gas sensing, but also has utility in data communications systems.

WO 03/061161 A2